
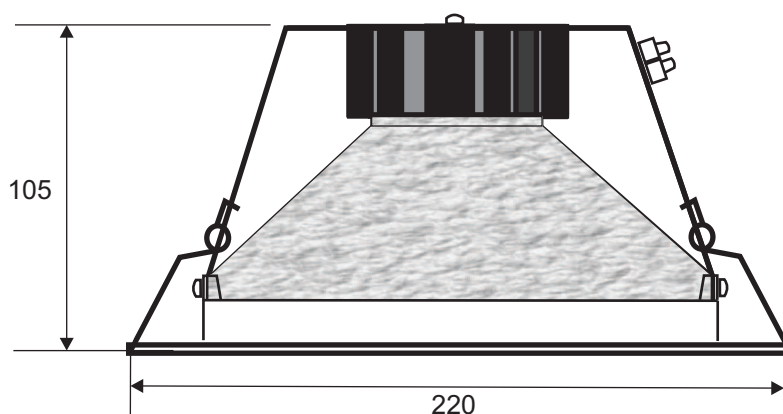


Downlights LED

ASTROLUX
ILUMINACION ASTROLUX, S.A.

DOWNLIGHT -AST-23/20-RCD

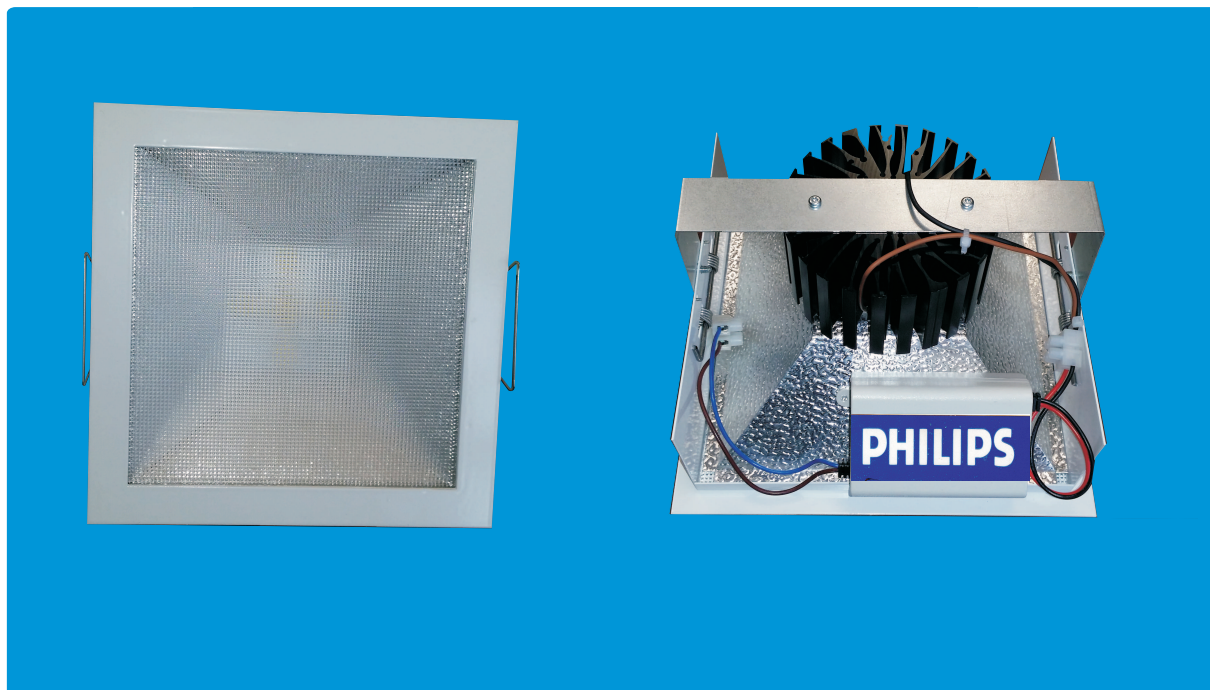

DOWNLIGHT AST-23/20-RCD

Equivalencia Downlight de 2x18W.PLC
Ahorro en % 44,4%
Optica. Angulo de 120°
Materiales. Aluminio gofrado, acero y metacrilato PMMA (Aleman)
LED. Fortimo LED DLM 2000/19/840 PHILIPS
Flujo luminoso. 2000 lm
CRI. 80
Temperatura color. 4000°K frio
Fuente. Xitanium 25W.lh0,3-1A 36v. I 230V.PHILIPS.
Consumo. 20 W.

